

**Addendum No. 1**

To: All Plan Holders  
Date: October 26, 2023  
Project: Orange County, Texas  
FEMA Public Assistance Funding, Precinct 4  
RFP-23016

1. Question: Why are there so many small quantities in each street?

**Answer: The County was awarded FEMA Public Assistance for these road repairs. FEMA Public Assistance provides funding for emergency assistance to restore community infrastructure affected by a federally declared disaster. Therefore, FEMA created these Scopes of Work to restore actual documented road damage caused by Hurricane Harvey which was found to be in multiple small sites as opposed to an entire road.**

2. Question: What's the overall intent of this project? Are we doing all the quantities or some?

**Answer: The intent of the project is to repair road damage caused by Hurricane Harvey using funds awarded to the County through FEMA Public Assistance. Work will include all the quantities in the base bid and, once bids are received, the County will determine alternate bid items. Any additional areas outside of the scope would be considered a change order and would be paid independently of specified quantities. Extra quantities will be considered for constructability concerns but not for convenience.**

3. Question: Can you provide total Surface Areas in Square Yards (SY) for these streets?

**Answer: Surface area measurements in Square Yards (SY) for Base Bid items are attached.**


4. Question: What is the process to receive payment for this project since it is FEMA funded?

**Answer: Although this project is funded by FEMA, the selected contractor will receive payment directly from the County as work is completed.**


5. Question: Is the contractor responsible for retaining all excavated materials?

**Answer: The County has multiple local areas available to place the excavated materials at no cost beyond trucking to the site. The contractor shall coordinate with the County on these areas during construction.**

Addendum No. 1 issued by:  
Orange County, Texas

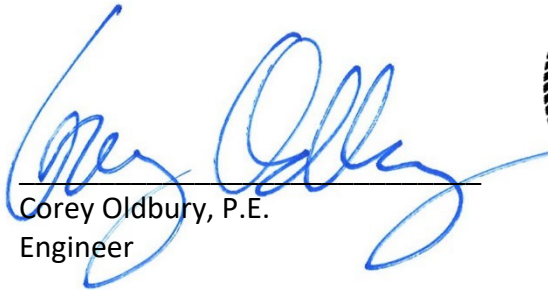

Corey Oldbury, P.E.  
Engineer



*October 26, 2023*

## RFP-23016 - FEMA-PA PRECINCT 4 ROADS

### ADDENDUM 1

October 26, 2023

Item No.	Description		Qty.	Unit	Qty.	Unit
Connolly Road						
5	GUARDRAIL	Remove and Replace Steel Guardrail (12 IN Wide, 8 IN Dia. Posts)	150	LF		
Bunns Bluff						
6	Site 1	Replace 4" Limestone Surface	723	CY	6500	SY
Gaulding Road						
7	Site 4	Remove and Replace 2" Chip and Seal Surface	4	CY	65	SY
8		Remove and Replace 6" Limestone Base	11	CY		
9	Site 5	Remove and Replace 2" Chip and Seal Surface	1	CY	10.67	SY
10		Remove and Replace 6" Limestone Base	2	CY		
West Lisa Drive						
11	Site 1	Remove and Replace 6" Limestone Surface	220	CY	2636.67	SY
Gerald Street						
12	Site 1	Remove and Replace 2" Chip and Seal Surface	1	CY	13.33	SY
13		Remove and Replace 6" Limestone Base	3	CY		
14	Site 2	Remove and Replace 2" Chip and Seal Surface	2	CY	32	SY
15		Remove and Replace 6" Limestone Base	6	CY		
16	Site 3	Remove and Replace 2" Chip and Seal Surface	1	CY	18.33	SY
17		Remove and Replace 6" Limestone Base	3	CY		
18	Site 4	Remove and Replace 2" Chip and Seal Surface	1	CY	17.78	SY
19		Remove and Replace 6" Limestone Base	3	CY		
20	Site 10	Remove and Replace 2" Chip and Seal Surface	5	CY	92	SY
21		Remove and Replace 6" Limestone Base	16	CY		
22	Site 11	Remove and Replace 2" Chip and Seal Surface	7	CY	124.44	SY
23		Remove and Replace 6" Limestone Base	21	CY		
Elliott Street						
24	Site 14	Remove and Replace 2" Chip and Seal Surface	3	CY	42.78	SY
25		Remove and Replace 6" Limestone Base	7	CY		
26	Site 17	Remove and Replace 2" Chip and Seal Surface	9	CY	161.78	SY
27		Remove and Replace 6" Limestone Base	17	CY		
28	Site 30	Remove and Replace 2" Chip and Seal Surface	14	CY	255.11	SY
29		Remove and Replace 6" Limestone Base	43	CY		
30	Site 55	Remove and Replace 2" Chip and Seal Surface	2	CY	24.44	SY
31		Remove and Replace 6" Limestone Base	4	CY		

Oleander Street						
32	Site 1	Remove and Replace 2" Asphalt Surface	53	CY	952	SY
33		Remove and Replace 6" Limestone Base	159	CY		
34	Site 2	Remove and Replace 2" Asphalt Surface	1	CY	17.22	SY
35		Remove and Replace 6" Limestone Base	3	CY		
36	Site 3	Remove and Replace 2" Asphalt Surface	4	CY	63.56	SY
37		Remove and Replace 6" Limestone Base	11	CY		
38	Site 4	Remove and Replace 2" Asphalt Surface	2	CY	24.44	SY
39		Remove and Replace 6" Limestone Base	4	CY		
Waddell Street						
40	Site 2	Remove and Replace 2" Asphalt Surface	3	CY	45.33	SY
41		Remove and Replace 6" Limestone Base	8	CY		
42	Site 3	Remove and Replace 2" Chip and Seal Surface	11	CY	201.33	SY
43		Remove and Replace 6" Limestone Base	34	CY		
44	Site 5	Remove and Replace 2" Chip and Seal Surface	1	CY	21.33	SY
45		Remove and Replace 6" Limestone Base	4	CY		
Love Road						
46	Site 1	Remove and Replace 2" Chip and Seal Surface	1	CY	4	SY
47		Remove and Replace 6" Limestone Base	1	CY		
48	Site 2	Remove and Replace 2" Chip and Seal Surface	1	CY	8.67	SY
49		Remove and Replace 6" Limestone Base	2	CY		
North Easy Street						
50	Site 1	Remove and Replace 2" Chip and Seal Surface	3	CY	56.67	SY
51		Remove and Replace 6" Limestone Base	10	CY		
52	Site 2	Remove and Replace 2" Chip and Seal Surface	10	CY	179.56	SY
53		Remove and Replace 6" Limestone Base	30	CY		
54	Site 3	Remove and Replace 2" Chip and Seal Surface	8	CY	139.78	SY
55		Remove and Replace 6" Limestone Base	14	CY		
56	Site 4	Remove and Replace 2" Chip and Seal Surface	5	CY	80.89	SY
57		Remove and Replace 6" Limestone Base	14	CY		
58	Site 5	Remove and Replace 2" Chip and Seal Surface	3	CY	49.78	SY
59		Remove and Replace 6" Limestone Base	9	CY		
60	Site 6	Remove and Replace 2" Chip and Seal Surface	6	CY	111.33	SY
61		Remove and Replace 6" Limestone Base	19	CY		
62	Site 7	Remove and Replace 2" Chip and Seal Surface	2	CY	21.78	SY
63		Remove and Replace 6" Limestone Base	4	CY		
64	Site 8	Remove and Replace 2" Chip and Seal Surface	2	CY	28.44	SY
65		Remove and Replace 6" Limestone Base	5	CY		
66	Site 9	Remove and Replace 2" Chip and Seal Surface	3	CY	43.56	SY
67		Remove and Replace 6" Limestone Base	7	CY		
68	Site 10	Remove and Replace 2" Chip and Seal Surface	9	CY	164.89	SY
69		Remove and Replace 6" Limestone Base	28	CY		
70	Site 11	Remove and Replace 2" Chip and Seal Surface	1	CY	18.67	SY
71		Remove and Replace 6" Limestone Base	3	CY		
Madison Street						
72	Site 1	Remove and Replace 2" Chip and Seal Surface	92	CY	549.11	SY
73		Remove and Replace 6" Limestone Base	31	CY		
Pine Forest Drive						
74	Site 4	Remove and Replace 2" Chip and Seal Surface	11	CY	197.78	SY
75		Remove and Replace 6" Limestone Base	33	CY		
76	Site 5	Remove and Replace 2" Chip and Seal Surface	3	CY	43	SY
77		Remove and Replace 6" Limestone Base	7	CY		